


2

1


PART NUMBER	DIM. A
PS080A-0131GG-P	.125"
PS080A-0132GG-P	.180"
PS080A-0133GG-P	.215"

REVISIONS		
REV.	DESCRIPTION	DATE
A	INITIAL RELEASE	9/15/2020

B

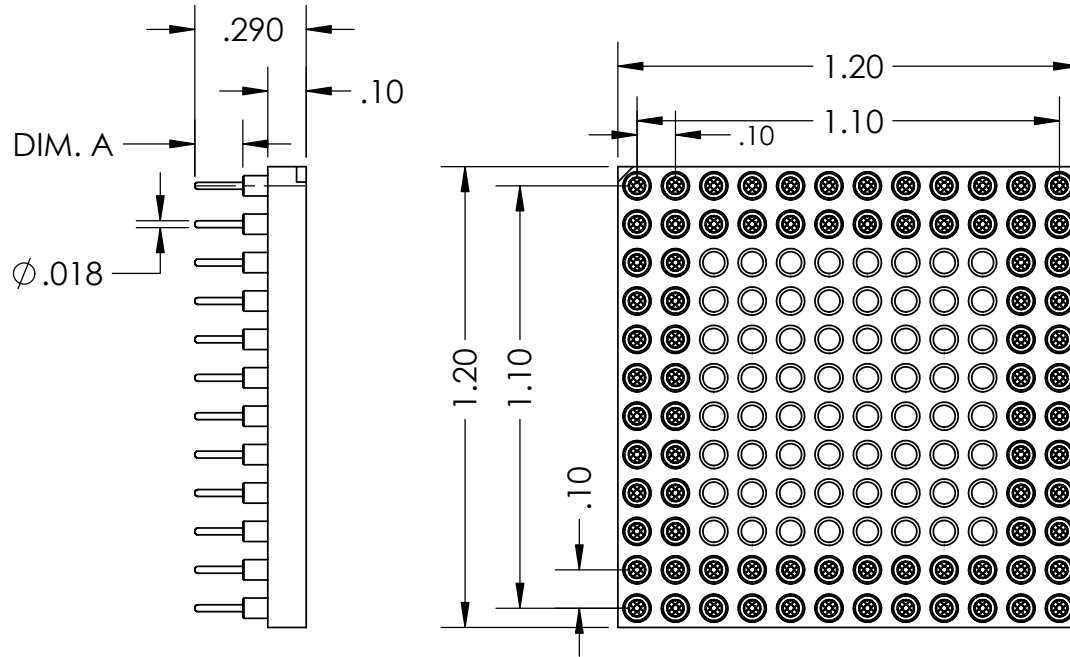

B

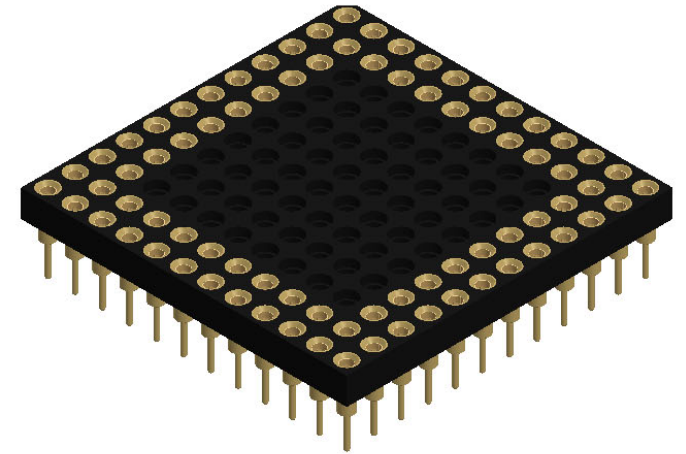

A

- NOTE:
1. INSULATOR MATERIAL: GLASS FILLED POLYESTER
 2. FLAMABILITY RATING: UL94V-0
 3. OPERATING TEMP: -55C TO +120C
 4. ACCEPTS -.015-.021 DIAMETER PIN
 5. SHELL MATERIAL: BRASS ALLOY C36000, 1/2 HARD
 6. SHELL PLATING 10μ MIN. OVER NICKEL, 100μ MIN
 7. CONTACT MATERIAL: BeCu
 8. CONTACT PLATING: 10μ MIN. OVER NICKEL, 100μ MIN

PROPRIETARY AND CONFIDENTIAL
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF ADAPTERS-PLUS INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF ADAPTERS-PLUS IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:		NAME	DATE
DIMENSIONS ARE IN INCHES		DRAWN	AM 09/15/20
TOLERANCES:		CHECKED	SB 09/15/20
FRACTIONAL ± .1		ENG APPR.	
ANGULAR: MACH ± .1		MFG APPR.	
TWO PLACE DECIMAL ± .01		Q.A.	
THREE PLACE DECIMAL ± .005		COMMENTS:	
INTERPRET GEOMETRIC TOLERANCING PER:			
MATERIAL			
FINISH			
DO NOT SCALE DRAWING			

 Adapters-Plus Inc. Ph: 209-839-0200 web: www.adapt-plus.com		
TITLE:		
80 PIN PGA SOCKET 12X12 GRID		
SIZE	DWG. NO.	REV
A	PS080A-013XGG-P	A
SCALE: 2:1	WEIGHT:	SHEET 1 OF 1

A

2

1