

# PA44-40-01-PD(Z) Data Sheet

44 pin PLCC socket/40 pin DIP 0.6" plug


## Supported Device/Footprints

These adapters connect a PLCC package to a 40 pin DIP footprint. They allow programming of some 44 PLCC devices in their 40 DIP footprint.

Other devices that require the same mapping are also supported. Below is a partial list of devices known to work with this adapter.


Zilog: Z86C21/E21/C61/E61  
Footprint: Same device 40 DIP

## Adapter Dimensions

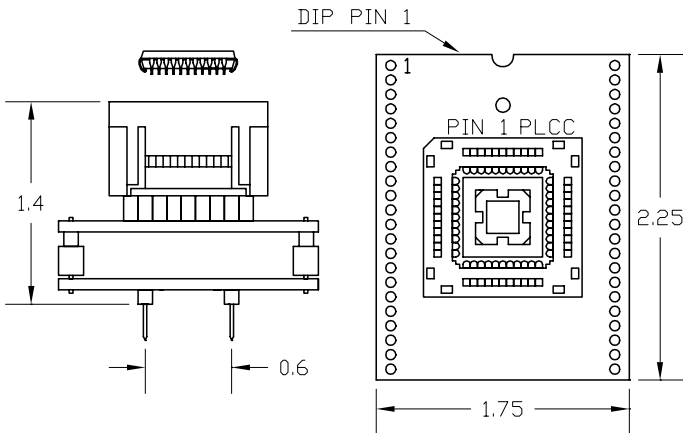

Press rim to open socket, Press device to close

PA44-40-01-PD

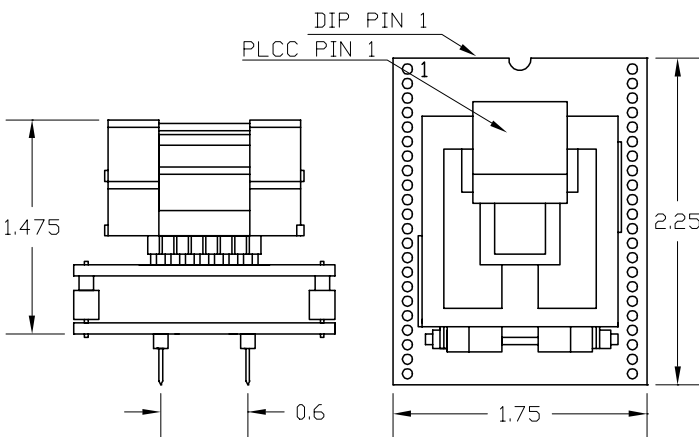

PA44-40-01-PDZ

## Adapter Construction

These adapters are made up of 3 sub-assemblies. They assemble via connectors making the adapter modular. This way the sub-assemblies can be replaced easily.

When disassembling the adapter take care not to bend the pins. When reassembling the adapter note the pin 1 indicators to align the parts correctly.

The following chart lists the adapters described by this datasheet and their subassemblies.

| Adapter        | Test Socket | Top Board | Bottom Board |
|----------------|-------------|-----------|--------------|
| PA44-40-01-PD  | 44-306      | 44PL2-3   | 44-40-01     |
| PA44-40-01-PDZ | 44-400      | 44PL2-Z   | 44-40-01     |

## Test Sockets

| LSC #  | Style      | Mfgr/P n                |
|--------|------------|-------------------------|
| 44-306 | Auto-Eject | Yamaichi IC120-0444-306 |
| 44-400 | Lidded ZIF | Yamaichi IC51-0444-400  |

## Adapter Wiring

The following chart shows the connections from the PLCC device to the adapter's DIP plug.

| PLCC Socket | DIP Plug | DIP Plug | PLCC Socket |
|-------------|----------|----------|-------------|
| 1           | 1        | 40       | 44          |
| 2           | 2        | 39       | 43          |
| 3           | 3        | 38       | 42          |
| 4           | 4        | 37       | 41          |
| 5           | 5        | 36       | 40          |
| 6           | N/C      | N/C      | 39          |
| 7           | 6        | 35       | 38          |
| 8           | 7        | 34       | 37          |
| 9           | 8        | 33       | 36          |
| 10          | 9        | 32       | 35          |
| 11          | 10       | 31       | 34          |
| 12          | 11       | 30       | 33          |
| 13          | 12       | 29       | 32          |
| 14          | 13       | 28       | 31          |
| 15          | 14       | 27       | 30          |
| 16          | 15       | 26       | 29          |
| 17          | N/C      | N/C      | 28          |
| 18          | 16       | 25       | 27          |
| 19          | 17       | 24       | 26          |
| 20          | 18       | 23       | 25          |
| 21          | 19       | 22       | 24          |
| 22          | 20       | 21       | 23          |

Skip and short notation: (6, 17, 28, 39)



**Adapters-Plus Inc.**

P.O. BOX 900  
Tracy, Ca 95378  
ph.209-839-0200  
fax.209-839-0235  
email: sales@adapt-plus.com