

2




1

PART NUMBERS	DIM. A
PS068A-0131GG-P	.125"
PS068A-0132GG-P	.180"
PS068A-0133GG-P	.215"

REVISIONS		
REV.	DESCRIPTION	DATE
A	INITIAL RELEASE	9/15/2020

B

B

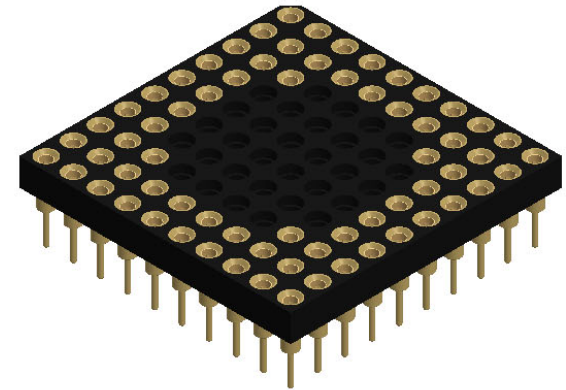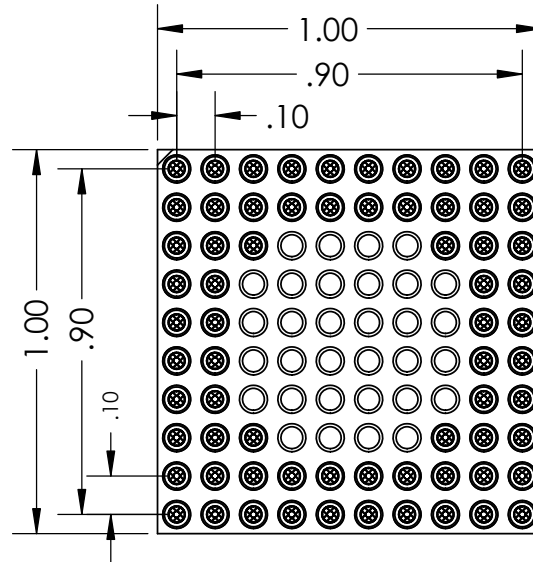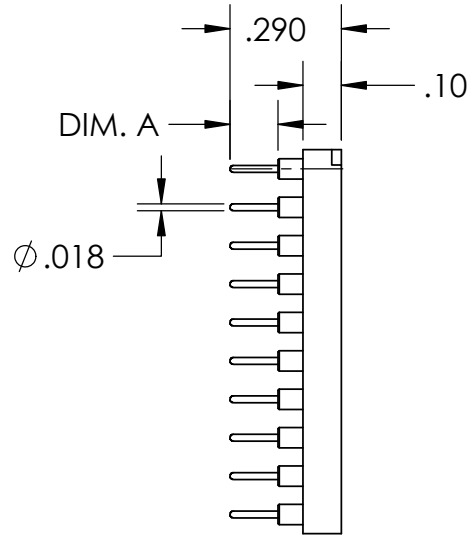

A

A

NOTE:

1. INSULATOR MATERIAL: GLASS FILLED POLYESTER
2. FLAMABILITY RATING: UL94V-0
3. OPERATING TEMP: -55 TO +120C
4. ACCEPTS -.015-.021 DIAMETER PIN
5. SHELL MATERIAL: BRASS ALLOY C36000, 1/2 HARD
6. SHELL PLATING 10µ MIN. OVER NICKEL, 100µ MIN
7. CONTACT MATERIAL: BeCu
8. CONTACT PLATING: 10µ MIN. OVER NICKEL, 100µ MIN

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF ADAPTERS-PLUS INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF ADAPTERS-PLUS IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN INCHES
 TOLERANCES:
 FRACTIONAL ± .1
 ANGULAR: MACH ± .1
 TWO PLACE DECIMAL ± .01
 THREE PLACE DECIMAL ± .005

INTERPRET GEOMETRIC TOLERANCING PER:

MATERIAL

FINISH

DO NOT SCALE DRAWING

	NAME	DATE
DRAWN	AM	09/15/20
CHECKED	SB	09/15/20
ENG APPR.		
MFG APPR.		
Q.A.		
COMMENTS:		


Adapters-Plus Inc.
 Ph: 209-839-0200
 web: www.adapt-plus.com

TITLE:
**68 PIN PGA SOCKET
 10X10 GRID**

SIZE A	DWG. NO. PS068A-013XGG-P	REV A
------------------	-----------------------------	-----------------

SCALE: 2:1 WEIGHT: SHEET 1 OF 1

2

1